

Trimflex 277V 8 in. 4000K, 1530lm LED Downlight with Modular Trim – White

- Attractive modular recessed downlight with high quality interchangeable trim
- 120-277V input voltage
- Phase-cut dimming at 120V
- ETL Listed – no additional hardware or housing required for installation
- Ships with smooth white trim
- Additional trims available in a variety of colors*
- Round trims are made of sturdy spun aluminum
- Simple installation – trims and light modules are threaded for easy secure installation; replaces both recessed housing trim and bulb
- Highly-recessed light source minimizes glare
- 32W fluorescent replacement lamp
- 4000K - cool white
- Compatible with most commercial dimmers**
- IC-Rated – suitable for insulation contact on or around housing
- Compatible with Philips Bodine ELI-S-20 Emergency Lighting Inverter
- Reduces energy consumption by over 40% when compared to traditional fluorescent bulbs
- 50,000 hours design lifetime
- 5-year limited warranty

*Additional trims sold separately.

**Dimming range may vary based on dimmer used.




Especificaciones	
Modelo	D8-L1530-C40-V277-TR
Número de parte	70158
Temperatura de color	4000K
Flujo luminoso	1530lm
Potencia	18W
Power Factor	0.9
CRI	80
Eficacia	85lm/W
Ángulo de haz	90°
Atenuable	Yes
Wet Rated?	No
Voltaje	120-277V
Temperatura de funcionamiento	-20°C to 40°C
Peso	24.32 oz.
Dimensions	9.65 x 4.33 x 9.65 in
Vida útil	50,000 Hours
Garantía	Garantía limitada de 5 año/s
Energy Star Product Listing	D8-L1530-C40-V277-TR

Certifications:



Trimflex 277V 8 in. 4000K, 1530lm LED Downlight with Modular Trim – White

Diagrams:

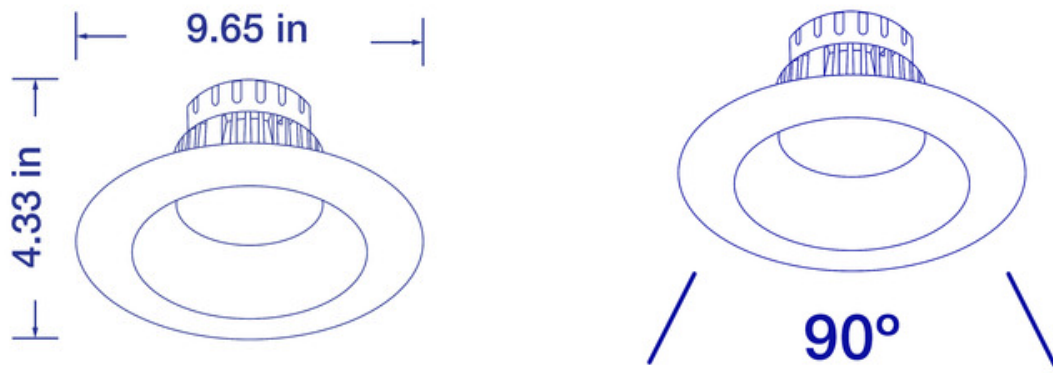


Available accessories:



8-inch Trim - Round, Black Smooth
(99546)



8" Goof Ring
(70459)

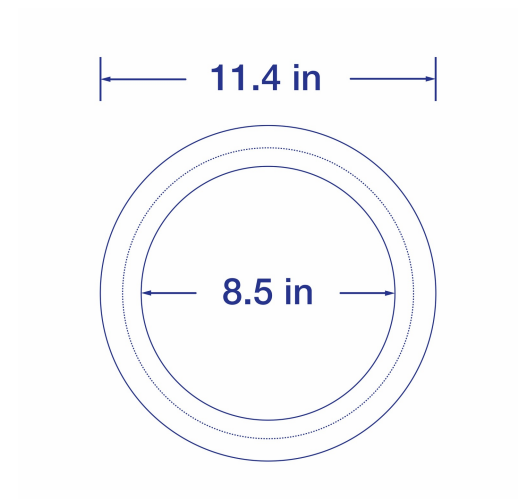

Dimensions
(70459)