

## 2' x 2' 40W CCT Selectable LED Flat Panel with Emergency Battery Backup

- Emergency Mode provides at least 90 minutes of battery backup in the event of a power loss
- Backup battery and test switch already integrated – no additional wiring required
- 2' x 2' size – easily fits into standard T-bar grid ceilings or can be surface mounted
- CCT selectable – panel easily switches between 3500K, 4000K and 5000K
- Precision micro-optics create uniform, glare-free light evenly distributed over entire panel
- Lightweight and ultra-thin (1.5") – ideal for both new construction and retrofit applications
- High quality construction – steel housing and white powder coated steel frame create the ultimate in durability
- 110 lm/W - cost-effective solution for high lumen output
- High efficiency, dimmable driver (0-10V)
- Suitable for damp locations
- 100-277V
- 50,000 hour rated lifetime
- 5-year Limited Warranty




| Specifications        |                         |
|-----------------------|-------------------------|
| Model                 | BP22-W40-3CCT-EM        |
| Part Number           | 70692                   |
| Color Temperature     | 3500/4000/5000K         |
| Lumen Output          | 4400 (1100 lm in EM)lm  |
| Wattage               | 40 (8W in EM)W          |
| Power Factor          | 0.9                     |
| CRI                   | 80                      |
| Efficacy              | 110lm/W                 |
| Dimmable              | 0-10V                   |
| Voltage               | 100-277V                |
| Operating Temperature | -20°C to 40°C           |
| Base                  | N/A                     |
| Weight                | 127.36 oz.              |
| Dimensions            | 23.74 x 2.80 x 23.74 in |
| Rated Lifetime        | 50000 Hours             |
| Warranty              | 5 Year Warranty         |
| DLC Product Listing   | BP22-W40-3CCT-EM        |

### Certifications:



# 2' x 2' 40W CCT Selectable LED Flat Panel with Emergency Battery Backup

## Additional Images:

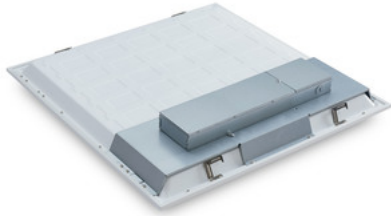

## Diagrams:

