

4 in. 3000K, 1200lm TranquiLED Low Glare LED Downlight with 0-10V Dimming

- Unique reflector produces low-glare lighting – ideal for offices, conference rooms, retail spaces, hotels, restaurants and more Specially-designed heatsink provides excellent thermal management – extends life of LED source
- Clean, consistent light scallop with homogenous illumination throughout
- ETL Listed – no additional hardware or housing required for installation
- IC-Rated – suitable for insulation contact on or around housing Ideal for both retrofit installation and new construction
- Thin profile – ideal for ceilings with small plenum spaces
- LED replacement for 26W CFL downlights
- 3000K - warm white
- 0-10V Dimming - compatible with most commercial dimmers* Energy efficient, long-lasting LED – over 45% reduction in energy costs compared to incandescent downlights
- 50,000 rated lifetime
- 5-year limited warranty

* Dimming range may vary based on dimmer used



Specifications


Model	D4TQ-C30-W14-V277
Part Number	70251
Color Temperature	3000K
Lumen Output	1200lm
Wattage	14W
Efficacy	86lm/W
CRI	90
Beam Angle	70°
Dimmable	0-10V
Voltage	100-277V
Power Factor	0.9
Operating Temperature	-25°C to 40°C
Weight	21.44 oz.
Dimensions	6.02 x 4.41 x 6.02 in
Rated Lifetime	50,000 Hours
Warrenty	5-Year Limited Warranty
Energy Star Product Listing	D4TQ-C30-W14-V277

Certifications:





4 in. 3000K, 1200lm TranquiLED Low Glare LED Downlight with 0-10V Dimming

Beam Angle:



Dimensions:

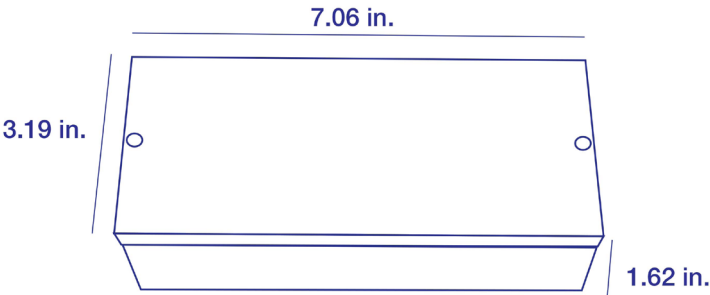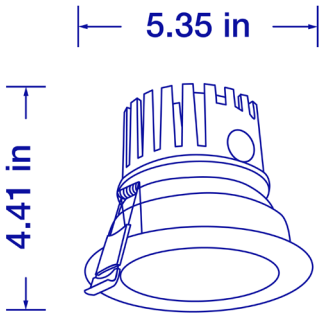

Polar Plots:

