


## 5 in 120V 5CCT Selectable Downlight

- Low profile, surface mount – mounts flush onto ceiling
- Can be installed into most 4 in recessed can housings with included brackets and pigtail
- Can be installed onto most junction boxes with included mounting plate and screws
- 90 CRI – renders illuminated colors with great accuracy
- JA8 certified – exceeds California Energy Commission standards
- 120V input voltage
- LED replacement for 75W incandescent downlights
- CCT Selectable (2700K/3000K/3500K/4000K/5000K)
- Compatible with most commercial dimmers\*
- Energy efficient, long-lasting LED – over 84% reduction in energy costs compared to incandescent downlights
- 50,000 hour rated lifetime
- 5-year limited warranty

\* Dimming range may vary based on dimmer used.

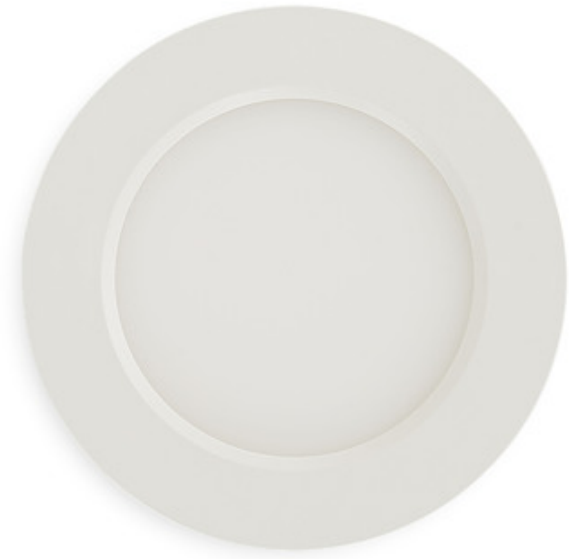

Specifications	
Model	D5-L730-5CCT-SM
Part Number	71164
Color Temperature	2700-5000K
Lumen Output	max 900lm
Wattage	12W
Replacement Equivalent	75W Incandescent equivalent
CRI	90
Efficacy	75lm/W
Beam Angle	110°
Dimmable	Yes
Wet Rated?	No
Voltage	120V
Operating Temperature	-20°C to 40°C
Base	E26
Weight	8.16 oz.
Dimensions	5.71 x 0.88 x 5.71 in
Design life	50000 Hours
Warranty	5 Year Limited Warranty

### Certifications:



## 5 in 120V 5CCT Selectable Downlight

### Additional Images:

