

## 2 ft. x 4 ft. 3500K, 36W LED Edge Lit Flat Panel

- 2 ft. x 4 ft. size – easily fits into standard T-bar grid ceilings
- High efficacy 130 lm/W – certified DLC Premium
- High efficiency, dimmable driver (0-10V)
- Uniform, glare-free light evenly distributed over entire panel
- Light Guide Plate utilizing high purity PMMA maximizes transparency and efficiency
- Lightweight and ultra-thin – easily replace existing fixtures
- High quality construction with smooth welds. Impact resistant, easy to clean
- Durable and attractive white powder-coat finish






Specifications	
Model	PN24-W36-C35-P
Part Number	99916
Color Temperature	3500K
Lumen Output	4680lm
Wattage	36W
Power Factor	0.9
CRI	80
Efficacy	130lm/W
Dimmable	0-10V
Voltage	100-277V
Operating Temperature	-20°C to 40°C
Weight	218.72 oz.
Dimensions	47.72 x 23.74 x 1.80 in
Rated Lifetime	50,000 Hours
Warranty	5-Year Limited Warranty
DLC Product Listing	PN24-W36-C35-P

### Certifications:



# 2 ft. x 4 ft. 3500K, 36W LED Edge Lit Flat Panel

## Diagrams:

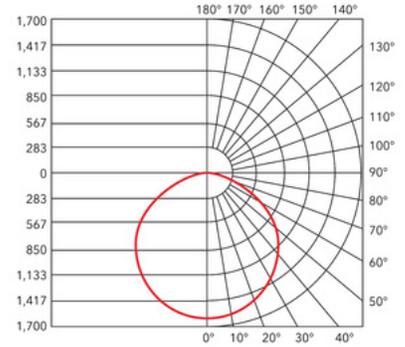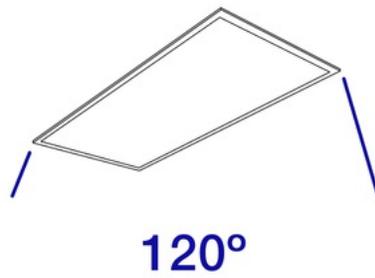

## Available accessories:



EM Kit - Converts standard Verbatim panel to Emergency Backup (99956)

Surface Mount Kit 2' x 4' (99345)