

5000K, 200W Sensor Ready LED Round High Bay Luminaire

- LED replacement for 400W and higher metal halide or fluorescent tube high bay fixtures
- Sensor* ready – optional plug-and-play sensor is quick to install before or after high bay installation
- Use sensor remote control* to easily set, test, update and apply various settings including hold time, stand-by dimming and daylight threshold
- Sensor utilizes microwave technology – excellent solution for variety of indoor applications including warehouses, manufacturing facilities, gymnasiums and more
- Die-cast aluminum housing and high-tempered glass lens provide maximum heat dissipation with heat and impact resistance
- High efficacy - 150 lm/W
- 0-10V dimming with a flicker-free driver – supports compliance with Title 24
- Simple installation with included J-hooks, chains and a pre-installed 6 ft. rubber-jacketed power cord
- 5000K - daylight
- 100-277V compatible
- 50,000 hour rated lifetime
- 5-year limited warranty



*Sold separately

Specifications	
Model	CRQ-200W-C50 [-MS;Blank]
Part Number	70610
Color Temperature	5000K
Lumen Output	30000lm
Wattage	200W
Power Factor	0.93
Efficacy	150lm/W
Dimmable	0-10V
Beam Angle	115°
Voltage	100-277V
Input Current	2200-794mA
Operating Temperature	-40°C to 45°C
Weight	128 oz.
Dimensions	11.34 x 6.12 x 11.34 in
Warranty	5 Year Limited Warranty
Rated Lifetime	50000 Hours
DLC Product Listing	CRQ-200W-C50 [-MS; blank]

Certifications:




5000K, 200W Sensor Ready LED Round High Bay Luminaire

Additional Images:




Diagrams:

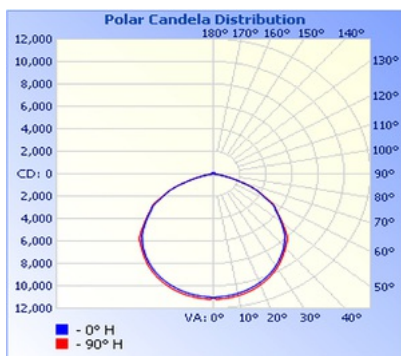

Available accessories:



Highbay Sensor
(70681)

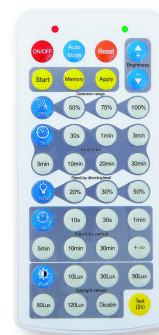

Highbay Remote Control
(70682)