

5000K, 110W Sensor Ready LED Linear High Bay Luminaire

- LED replacement for up to 250W metal halide or fluorescent tube high bay fixtures
- Sensor* ready – optional plug-and-play sensor is quick to install before or after high bay installation
- Use sensor remote control* to easily set, test, update and apply various settings including hold time, stand-by dimming and daylight threshold
- Sensor utilizes microwave technology – excellent solution for variety of indoor applications including warehouses, manufacturing facilities, gymnasiums and more
- Powder-coated steel housing and acrylic lens provide durability and heat dissipation with lower glare and impact resistance
- High efficacy - 135 lm/W
- 0-10V dimming with a flicker-free driver – supports compliance with Title 24
- Simple installation with included V-hooks, chains and a pre-installed 6 ft. rubber-jacketed power cord
- 5000K - daylight
- 120-277V compatible
- 50,000 hour rated lifetime
- 5-year limited warranty

*Sold separately



Specifications	
Model	HB-110W-C50 [-MS;Blank]
Part Number	70623
Color Temperature	5000K
Lumen Output	14850lm
Wattage	110W
Power Factor	0.93
Efficacy	135lm/W
Dimmable	0-10V
Voltage	120-277V
Input Current	1009-437mA
Operating Temperature	-20°C to 50°C
Weight	109.6 oz.
Dimensions	23.83 x 2.89 x 9.60 in
Rated Lifetime	50000 Hours
Warranty	5-Year Limited Warranty
DLC Product Listing	HB-110W-C50 [-MS; blank]

Certifications:




5000K, 110W Sensor Ready LED Linear High Bay Luminaire

Additional Images:




Diagrams:

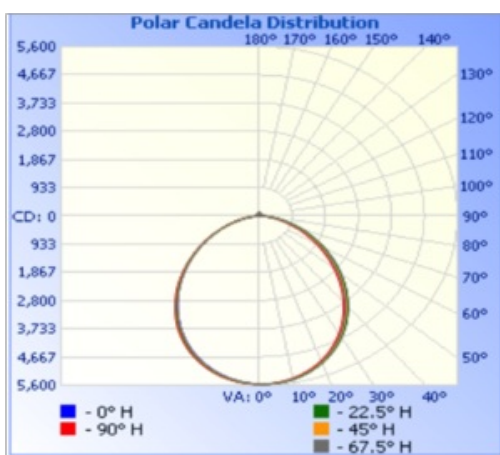

Available accessories:



Highbay Sensor
(70681)

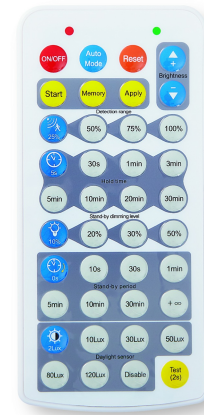

Highbay Remote Control
(70682)