

4 ft. 5000K, 26W LED Batten Luminaire with Dual Motion Sensors

- Dual infrared motion sensors – mounted on each end of fixture for accurate motion detection, rotate to optimize desired coverage
- Bi-level operation – 26W, 3000 lumen light output when motion is detected, dims to 33% (8W) output when motion is not detected
- On time and detection zone are adjustable using optional remote control (#98992)
- High efficacy - 115lm/W
- Ideal for stairwells, passageways, parking garages
- Includes mounting hardware: junction box adapter plate, v-hooks and chain
- Suitable for surface or suspended (chain) mounting
- Side and base knockouts provided for ceiling or wall mounting
- 5000K - Daylight
- 100-277V Input voltage
- 50,000 hour rated lifetime
- 5-year limited warranty



Specifications


Model	BAT-4FT-W26-C50-MS-NON
Part Number	99305
Color Temperature	5000K
Lumen Output	3000lm
Wattage	26W
Power Factor	0.9
CRI	>80
Efficacy	115lm/W
Dimmable	No
Voltage	100-277V
Input Current	80-330mA
Operating Temperature	-20°C to +40°C
Detection Zone (Motion Sensor)	360° / 26 ft. (At 8-10' Installation Height)
Detection Angle (Motion Sensor)	140°
ON Time	Default: 5 minutes Adjustable: 5, 10, 30 sec. or 1, 5, 15 min. (With optional remote*)
Motion Sensor Sensitivity	Default: 40 ft. Adjustable: 20, 30, or 40' (With optional remote*)
Weight	83.2 oz.
Dimensions	50.37 x 2.44 x 3.43 in
Rated Lifetime	50000 Hours
Warranty	5-Year Limited Warranty
DLC Product Listing	BAT-4FT-W26-C50-MS-NON

Certifications:




4 ft. 5000K, 26W LED Batten Luminaire with Dual Motion Sensors

Additional Images:



Diagrams:

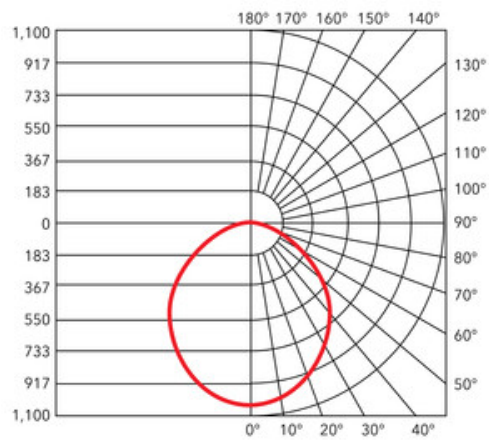

Available accessories:



Batten Remote
(98992)